

Catalogue

Intelligent Compact Drives IclA N065



Product description2
Functions7
IcIA N065 without gearing	
Technical data9
Dimensional drawings11
IcIA N065 with spur wheel gearing	
Technical data12
Dimensional drawings14
IcIA N065 with planetary gearing	
Technical data15
Dimensional drawings17
IcIA N065 with angular planetary gearing	
Technical data18
Dimensional drawings20
IcIA N065 with angular worm gearing	
Technical data21
Dimensional drawings23
Type code24
Accessories25
Appendix	
Conversion tables27

Product description

The IcIA N065 DC024 intelligent compact drives are servo drives based on an electronically commutated three-phase synchronous motor, referred to as an EC motor, and a block-commutated positioning controller. Power and control electronics with fieldbus terminal, motor, position sensor and gearing are integrated in the compact unit.

Areas of application

The compact drives are designed primarily for automatic positioning of format axes during setup of production machines or for point-to-point positioning of handling systems.

Special features

- Compact construction
- Low wiring requirements
- Integrated positioning and speed control functions as specified by CiA profiles DS301 and DS402
- Fieldbus interface
- High power density
- High availability
- 4 gearing models

The magnetisation of the motors guarantees high detent torque, making it unnecessary to use a holding brake in many applications. The motors have an internal resolution of 12 increments per revolution. Spur wheel gearing, planetary gearing, angular planetary gearing and spur wheel angular worm gearing are available.

Product offer






without gearing

with spur wheel gearing


with planetary gearing

with angular planetary gearing

with angular worm gearing

**IcIA N065 without gearing**


The electronically commutated three-phase synchronous motor in combination with the rare-earth magnets offers outstanding power density and very high efficiency. The motors have a high detent torque, making it unnecessary to use a holding brake in most cases. The motors have an internal resolution of 12 increments per revolution.

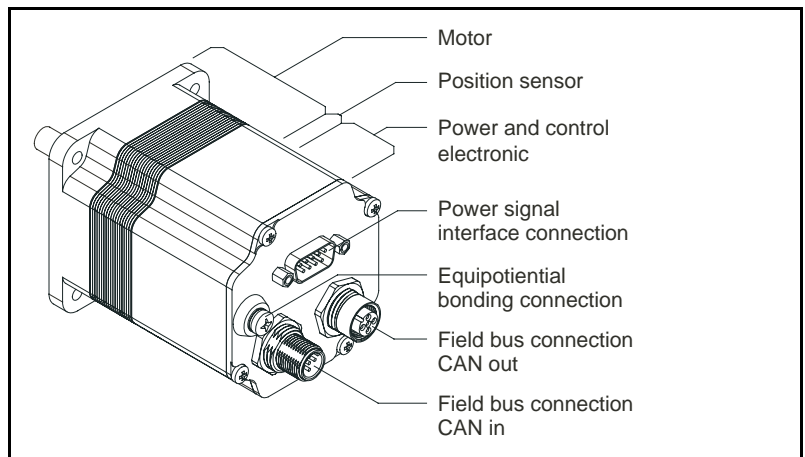

IcIA N065 O-000 intelligent compact drive as direct drive

IcIA N065 with spur wheel gearing


The IcIA N065 V-... compact drive is fitted with a 2, 3 or 4-ratio spur wheel gearing. The gear teeth are metal and fitted with needle bearings. An important feature is the high power density, the low torsional backlash and the compact length of the drive system with spur wheel gearing.

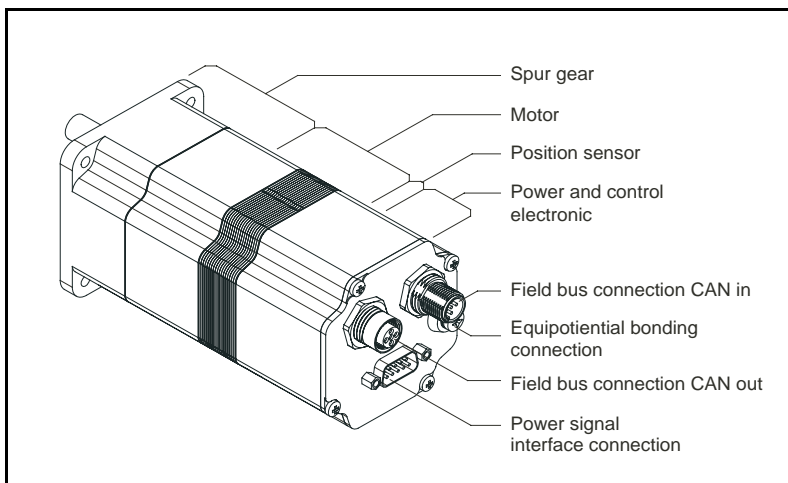

IcIA N065 V-... intelligent compact drive with spur wheel gearing

IcIA N065 with planetary gearing


The IcIA N065 1-... compact drive is fitted with 2 or 3-ratio planetary gearing. The drive systems with planetary gearing have minimum torsional backlash and very high output torque with very high efficiency.

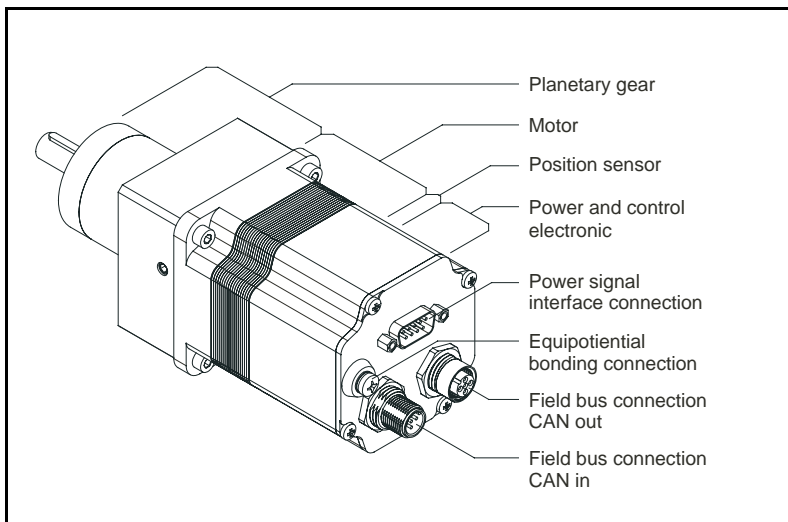

IcIA N065 1-... intelligent compact drive with planetary gearing

IcIA N065 with angular planetary gearing


IcIA N065 G-... compact drive is fitted with 2 or 3-ratio planetary gearing with an additional bevel gear ratio. The drive systems with angular planetary gearing have minimum torsional backlash and very high output torque with very high efficiency.

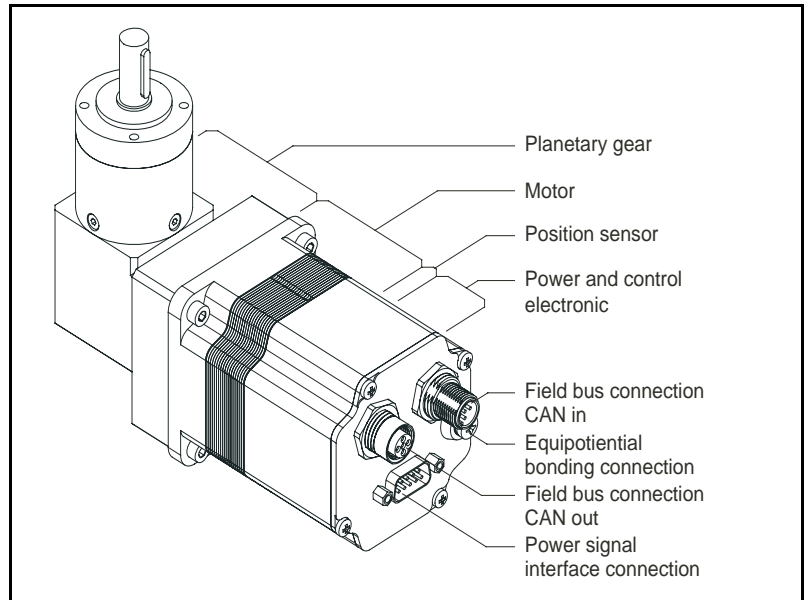


IcIA N065 G-... intelligent compact drive with angular planetary gearing

IcIA N065 with angular worm gearing

IcIA N065 U-... compact drive is fitted with a 1 or 2-ratio spur wheel gearing and angular worm gearing. The drive systems with angular worm gearing have minimum torsional backlash and very high output torque. The spur wheel and worm reduction combination can be set according to the application for high efficiency values up to self-locking. This type of gearing often proves suitable for implementation of compact and complex installation situations.

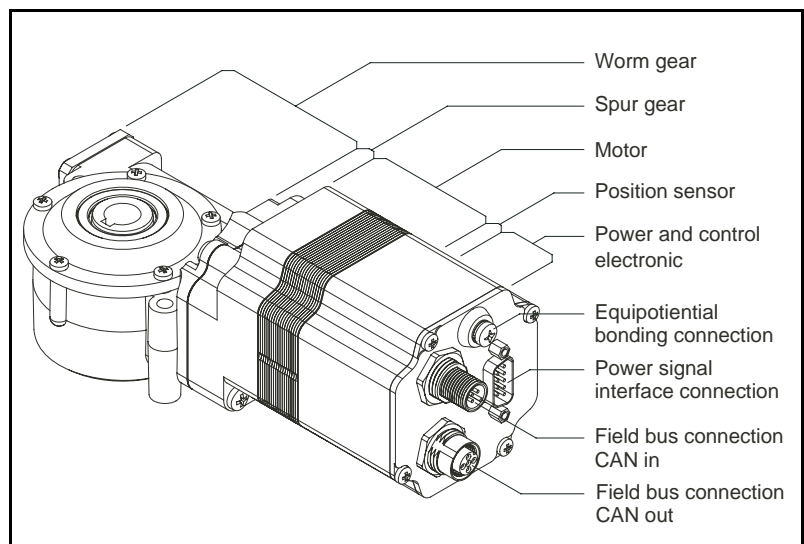

IcIA N065 U-... intelligent compact drive with angular worm gearing

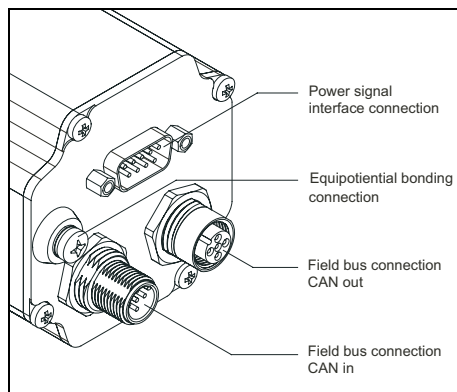

Connections

Overview

Connections of the IcIA N065 intelligent compact drives:

- Signal interface
- Connection for equipotential bonding conductor
- CAN fieldbus interface

Signal interface

The signal interface is a 9-pin SubD connector supplied by FCT electronic GmbH (www.fct-electronic.de) and has the following functions:

- supply voltage connection
- power for manual mode control signals
- connection for enable signal
- power connection for signal interface


CAN fieldbus interface

CAN in input

The "CAN in" input for the CAN fieldbus is a 5-pin M12 flange connector supplied by Franz Binder GmbH (www.binder-connector.de).

CAN out output

The compact drive also has a 5-pin M12 flange socket supplied by Franz Binder GmbH for networking the CAN fieldbus. Additional network devices can be connected here.

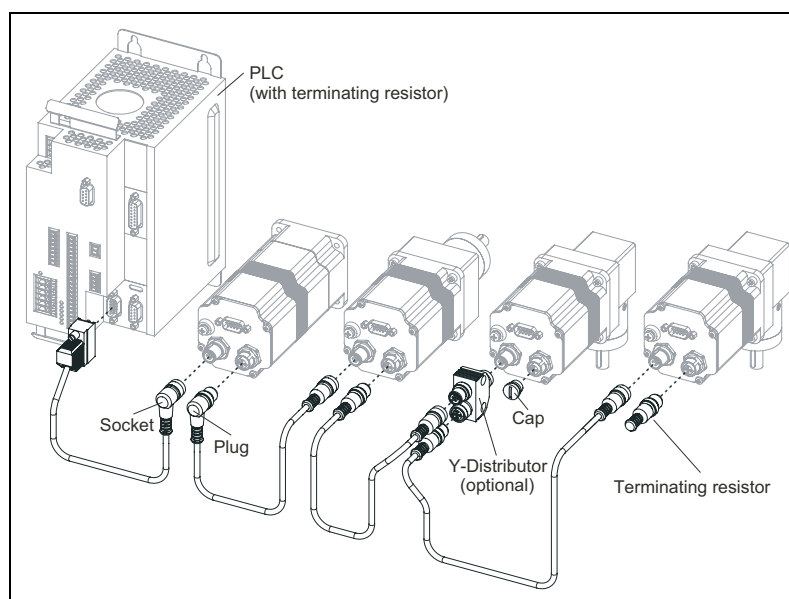

Networking of four IcIA N065 with a PLC

Functions

Operating modes

Overview

The following operating modes can be set with signals:

- Jog

The following operating modes can be set via fieldbus:

- Jog
- Homing
- Profile position
- Speed control mode

Jog

Jogging via signals

In manual operation using signals the compact drive moves at an adjustable speed within the referenced work stroke. The direction of movement and the jog or continuous operation operating modes are preset over two signal inputs.

Jog via fieldbus

In manual operation via fieldbus the compact drive can also be moved clockwise or counterclockwise within the homing range. The direction of motion and the speed are specified over the fieldbus.

Homing

The compact drive must be homed for "Manual Operation" and "Profile Position" operating modes. The homing specifies three limit switch points for every direction of motion. The compact drive monitors them continuously for overshoot. A homing is also retained after switching the compact drive off and on if the drive was not rotated when the power was off.

Profile position

In "profile position" operating mode the homed compact drive can be moved from point A to point B. A trapeze profile is specified; application-specific trapeze profiles with values for final speed with acceleration and deceleration ramps can be saved in nine additional parameter sets.

Speed control mode

In "speed control" operating mode travel commands are processed via the fieldbus. In this operating mode the drive requires homing if the software limit switches are used. The function of the software limit switches can be disabled by setting parameters of all software limit switches to the minimum or maximum range limits. The compact drive can then also be moved in speed control mode without homing. The reference value of a travel command is the set speed of the drive movement. The acceleration and braking ramp is parameterised and can be adjusted for the specific application.

Operating functions

Communication configuration

Communication parameters of the compact drive can be set for data exchange over fieldbus.

In the CANopen network the baud rate and node number parameters can be modified with LSS (Layer Setting Services).

Configuration mode

Parameter values for the compact drive can only be set via the fieldbus. The configuration mode offers the option of adjusting the compact drive for the operating conditions.

ENABLE

The "ENABLE" function is triggered by a fieldbus command (1st channel) or by interruption of the control signal `ENABLE` (2nd channel).

The current travel command is cancelled in different ways.

In the case of the fieldbus command an error flag is set and the motor is brought to a standstill with the Quick Stop ramp.

The interruption of the emergency stop control signal `ENABLE` triggers a time-delayed deactivation of the power electronics. The compact drive is braked at maximum power. After elapse of the delay time the power electronics are disabled. The error flag is set.

Additional operating functions

Various operating functions provide protection against damage and malfunctions:

- Start diagnosis at Power On (self-test of the integrated electronics)
- Current limiting
- Overload monitoring
- Voltage monitoring
- Temperature monitoring
- Start-up error detection
- Rotational speed monitoring
- Block movement detection
- Commutation error and Hall sensor error detection
- Protection against externally applied acceleration
- Electronic log-book
- Watchdog (program sequence monitoring)

IcIA N065 without gearing**Technical data**

Pole pair count p		2
Nominal voltage U_{DC}	V	24
Nominal speed n_N	1/min	4350
Nominal current $I_{N\ DC}$	A	3.79
Nominal output P_N	W	71
Nominal motor torque M_N	Nm	0.155
Ready-for-operation current I_0	A	0.09
Max. phase current \hat{i}	A	6.0
Torque constant k_M	Nm/A	0.036
Starting torque M_{max}	Nm	0.22
Detent torque M_S	Nm	0.08
Moment of inertia	kgcm ²	0.151
Max. speed of rotation	1/min	5000
Positioning resolution	Inc/rev.	12
Positioning resolution	°	30
Positioning accuracy	Inc.	±1
Mass m	kg	0.8
Shaft load		
• Max. radial force F_R ¹⁾	N	80
• Max. axial force pull F_A	N	30
• Nominal bearing lifetime L_{10h} ²⁾	h	20000

¹⁾ Action point of the radial shaft load: 12.5 mm distance from flange


²⁾ Operating hours at a probability of failure of 10%

Ambient conditions

Operating temperature as per DIN EN 60721-3-3, Class 3K3	°C	+5 ... +40 (without power reduction)
Storage temperature as per DIN EN 60721-3-1, Class 1K4	°C	-25 ... +55
Transport temperature as per DIN EN 60721-3-2, Class 2K3	°C	-25 ... +70
Installation height without power reduction	m	<1000 above MSL
Vibration strain		sinusoidal, as per DIN EN 60068-2-6
• Acceleration amplitude:	m/s ²	50
• Frequency range	Hz	10 ... 300
• Amplitude	mm	0.35
Continuous shock		semisinusoidal, as per DIN EN 60068-2-27
• Peak acceleration	m/s ²	300
• Duration	m/s	18
Relative humidity		
• Operation	%	5 ... 85
	g/m ³	1 ... 25
• Long-term storage	%	5 ... 95
	g/m ³	1 ... 29
Degree of protection as per DIN EN 60034-5		IP 65 total device except for shaft bushing; IP 41 shaft bushing


Characteristic curves

IcIA N065 DC024 without gearing

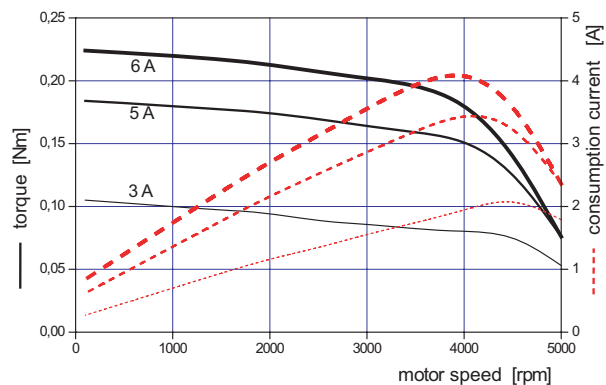

Electrical interfaces

Power supply		reverse-polarity-protected
Nominal power supply range	V _{DC}	19.2 ... 28.8
Ripple at nominal voltage	V	≤3.6
Inrush current	A	Load current for DC bus capacity (500 µF)
24V signal interface		4 signal inputs, 0VDC internally connected with 0VDC supply voltage, reverse-polarity-protected
Permissible low level	V / mA	≤4.5 / ≤0.7
Permissible high level	V / mA	≥15 / ≥2
Admissible voltage range	V	0 ... 30
Signal input debounce time	ms	50 (in manual mode) without debounce (homing movement switch and end position sensors)
CANopen fieldbus interface		CANIn/CANOut - topology
Signal inputs/outputs		according to ISO 11898, no galvanic isolation
Transmission rate	kBaud	10 / 20 / 50 / 100 / 125 / 250 / 500 / 800 / 1000
Transmission protocol		
• Communications profile		DS301 V4.02
• Device profile		DSP 402 V2.0

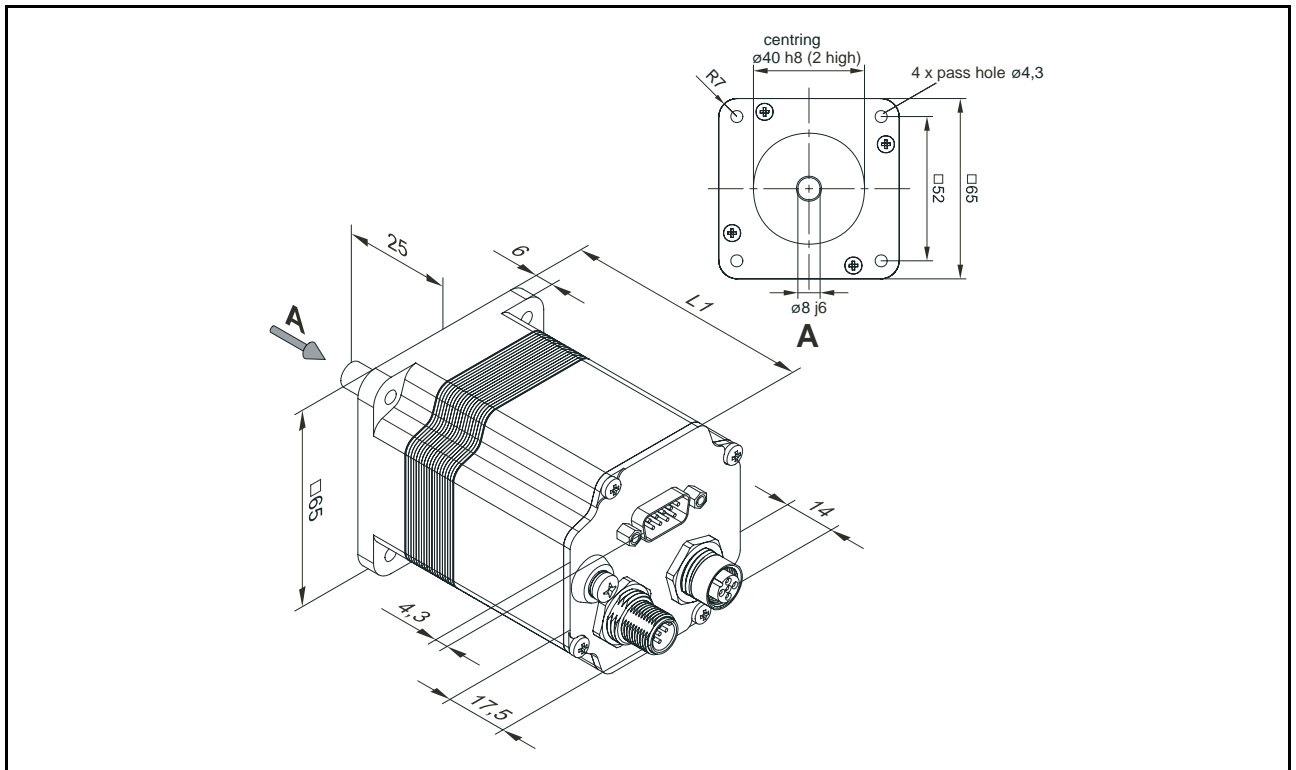Dimensional drawings

Dimensional drawing of IcIA N065 O-000 without gearing

IcIA N065 with spur wheel gearing

Technical data

with spur wheel gearing ...		V-007	V-018	V-038	V-054	V-115
Nominal voltage	V	24	24	24	24	24
Nominal speed	1/min	4000	4000	4000	4000	4000
Nominal output torque	Nm	1.1	2.7	5.8	7.9	12.3
Nominal output speed	1/min	586	225	107	73	35
Nominal output	W	68	64	64	61	45
Nominal current	A	4.43	4.43	4.43	4.43	3.16
Ready-for-operation current	A	0.09	0.09	0.09	0.09	0.09
Max. phase current	A	6.0	6.0	6.0	6.0	4.5
Maximum speed	1/min	733	281	133	92	44
Gear speeds		2	3	3	4	4
Gear efficiency		0.90	0.86	0.86	0.81	0.81
Ratio		430: 63	160: 9	75: 2	490: 9	3675: 32
Torque constant	Nm/A	0.036	0.036	0.036	0.036	0.036
Starting torque	Nm	1.3	3.3	6.9	9.6	15.2
Moment of inertia ¹⁾	g cm ²	151	151	151	151	151
Moment of inertia ²⁾	kg m ²	0.0007	0.0048	0.0212	0.0448	0.1992
Detent torque	Nm	0.5	1.3	2.8	4.1	8.6
Positioning resolution	Inc./rev	12	12	12	12	12
Positioning resolution	°	4.40	1.69	0.80	0.55	0.26
Positioning accuracy	Inc.	±1	±1	±1	±1	±1
Mass	kg	1.1	1.2	1.2	1.2	1.2
Number of pole pairs		2	2	2	2	2
Torsional backlash	°	≤1.5	≤1.0	≤1.0	≤1.0	≤1.0
Shaft load						
• Short-term operation						
- Max. radial force ³⁾	N	200	200	200	200	200
- Max. axial force	N	80	80	80	80	80
- Nominal service life L _{10h} ⁴⁾	h	2500	2500	2500	2500	2500
• Continuous operation						
- Max. radial force ³⁾	N	200	200	200	200	200
- Max. axial force	N	10	10	10	10	10
- Nominal service life L _{10h} ⁴⁾	h	15000	15000	15000	15000	15000

¹⁾ With reference to motor shaft

²⁾ with reference to gearing output shaft

³⁾ action point of the radial shaft load: 12.5 mm distance from flange


⁴⁾ operating hours at a probability of failure of 10%

Ambient conditions


Operating temperature as per DIN EN 60721-3-3, Class 3K3	°C	+5 ... +40 (without power reduction)
Storage temperature as per DIN EN 60721-3-1, Class 1K4	°C	-25 ... +55
Transport temperature as per DIN EN 60721-3-2, Class 2K3	°C	-25 ... +70
Installation height without power reduction	m	<1000 above MSL
Vibration strain		sinusoidal, as per DIN EN 60068-2-6
• Acceleration amplitude:	m/s ²	50
• Frequency range	Hz	10 ... 300
• Amplitude	mm	0.35
Continuous shock		semisinusoidal, as per DIN EN 60068-2-27
• Peak acceleration	m/s ²	300
• Duration	m/s	18
Relative humidity		
• Operation	%	5 ... 85
	g/m ³	1 ... 25
• Long-term storage	%	5 ... 95
	g/m ³	1 ... 29
Degree of protection as per DIN EN 60034-5		IP 65 total device except for shaft bushing; IP 54 shaft bushing

Characteristic curves


IcIA N065 DC024 with spur wheel gearing V-007

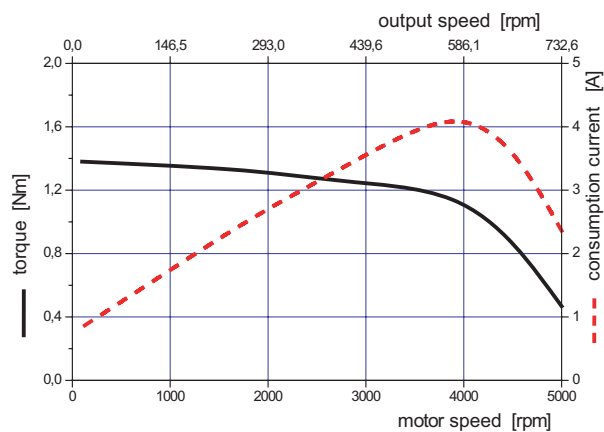


IcIA N065 DC024 with spur wheel gearing V-018

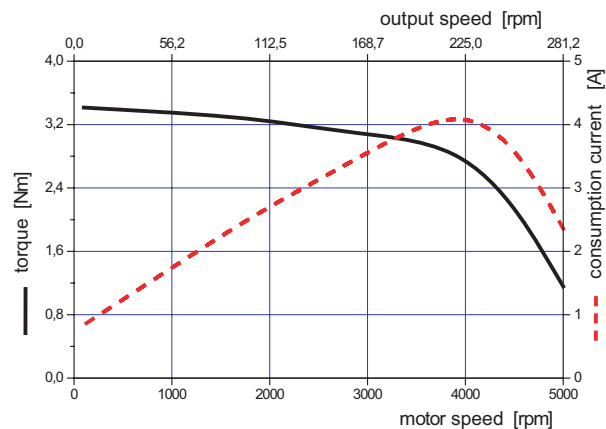


IcIA N065 DC024 with spur wheel gearing V-038

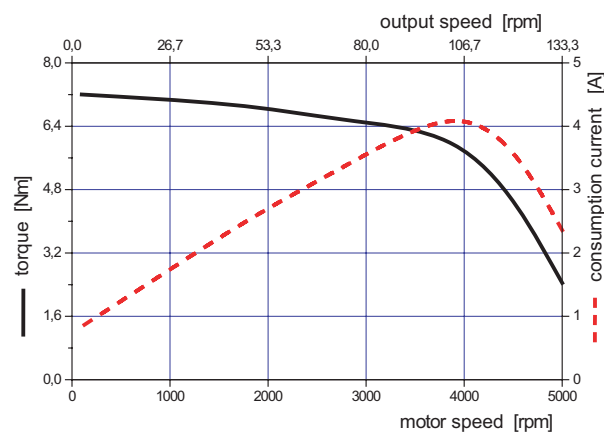

IcIA N065 DC024 with spur wheel gearing V-054

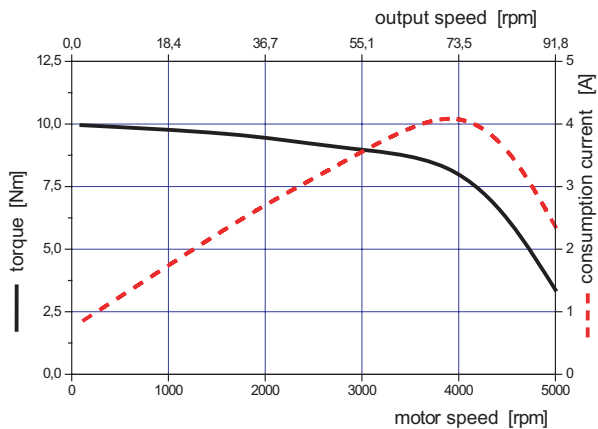


IcIA N065 DC024 with spur wheel gearing V-115

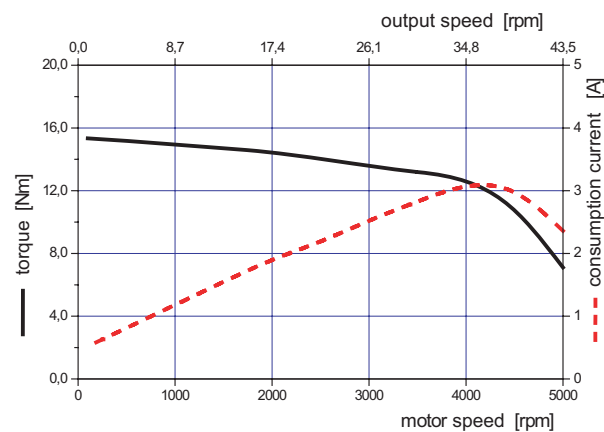

Electrical interfaces

Power supply		reverse-polarity-protected
Nominal power supply range	V _{DC}	19.2 ... 28.8
Ripple at nominal voltage	V	≤3.6
Inrush current	A	Load current for DC bus capacity (500 µF)
24V signal interface		4 signal inputs, 0VDC internally connected with 0VDC supply voltage, reverse-polarity-protected
Permissible low level	V / mA	≤4.5 / ≤0.7
Permissible high level	V / mA	≥15 / ≥2
Admissible voltage range	V	0 ... 30
Signal input debounce time	ms	50 (in manual mode) without debounce (homing movement switch and end position sensors)
CANopen fieldbus interface		CANIn/CANOut - topology
Signal inputs/outputs		according to ISO 11898, no galvanic isolation
Transmission rate	kBaud	10 / 20 / 50 / 100 / 125 / 250 / 500 / 800 / 1000
Transmission protocol		
• Communications profile		DS301 V4.02
• Device profile		DSP 402 V2.0

Dimensional drawings

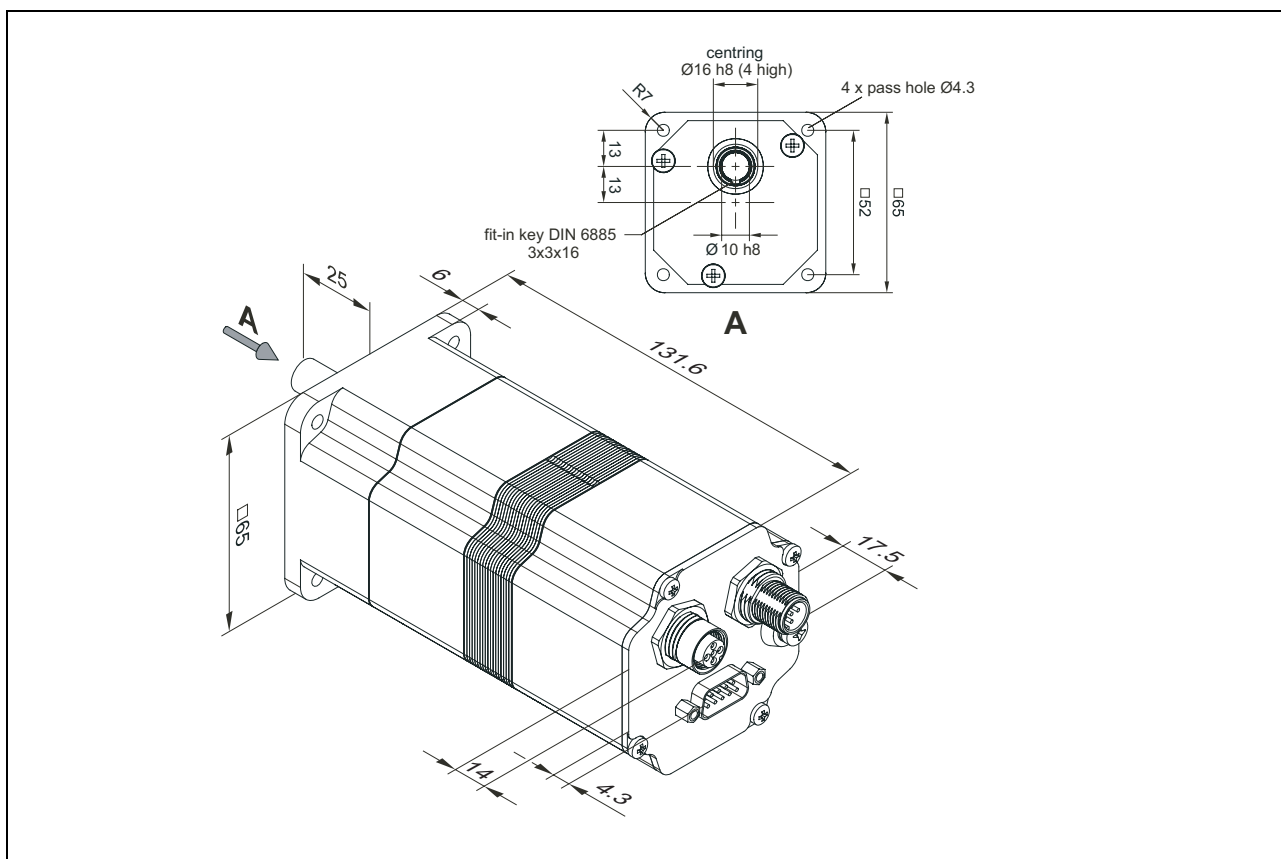

Dimensional drawing of IcIA N065 DC024 V-... with spur wheel gearing

IcIA N065 with planetary gearing**Technical data**


with planetary gearing ...		1-016	1-040	1-060	1-120
Nominal voltage	V	24	24	24	24
Nominal speed	1/min	4000	4000	4000	4000
Nominal output torque	Nm	2.7	6.8	9.7	18.0
Nominal output speed	1/min	250	100	67	33
Nominal output	W	71	71	67	63
Nominal current	A	4.43	4.43	4.43	3.85
Ready-for-operation current	A	0.09	0.09	0.09	0.09
Max. phase current	A	6.0	6.0	6.0	5.4
Maximum speed	1/min	313	125	83	42
Gear speeds		2	2	3	3
Gear efficiency		0.94	0.94	0.90	0.90
Ratio		16:1	40:1	60:1	120:1
Torque constant	Nm/A	0.036	0.036	0.036	0.036
Starting torque	Nm	3.3	8.1	11.6	21.0
Moment of inertia ¹⁾	g cm ²	151	151	151	151
Moment of inertia ²⁾	kg m ²	0.0039	0.0242	0.0544	0.2174
Detent torque	Nm	1.2	3.0	4.5	9.0
Positioning resolution	Inc./rev	12	12	12	12
Positioning resolution	°	1.88	0.75	0.50	0.25
Positioning accuracy	Inc.	±1	±1	±1	±1
Mass	kg	1.4	1.4	1.5	1.5
Number of pole pairs		2	2	2	2
Torsional backlash	°	≤0.58	≤0.58	≤0.67	≤0.67
Shaft load					
• Max. radial force ³⁾		200	200	200	200
• Max. axial force		200	200	200	200
• Nominal service life L _{10h} ⁴⁾		10000	10000	10000	10000

¹⁾ With reference to motor shaft²⁾ with reference to gearing output shaft³⁾ with reference to the centre of the output shaft⁴⁾ operating hours at a probability of failure of 10%**Ambient conditions**


Operating temperature as per DIN EN 60721-3-3, Class 3K3	°C	+5 ... +40 (without power reduction)
Storage temperature as per DIN EN 60721-3-1, Class 1K4	°C	-25 ... +55
Transport temperature as per DIN EN 60721-3-2, Class 2K3	°C	-25 ... +70
Installation height without power reduction	m	<1000 above MSL
Vibration strain		sinusoidal, as per DIN EN 60068-2-6
• Acceleration amplitude:	m/s ²	50
• Frequency range	Hz	10 ... 300
• Amplitude	mm	0.35
Continuous shock		semisinusoidal, as per DIN EN 60068-2-27
• Peak acceleration	m/s ²	300
• Duration	m/s	18
Relative humidity		
• Operation	%	5 ... 85
	g/m ³	1 ... 25
• Long-term storage	%	5 ... 95
	g/m ³	1 ... 29
Degree of protection as per DIN EN 60034-5		IP 65 total device except for shaft bushing; IP 43 shaft bushing

Characteristic curves


IcIA N065 DC024 with planetary gearing 1-016

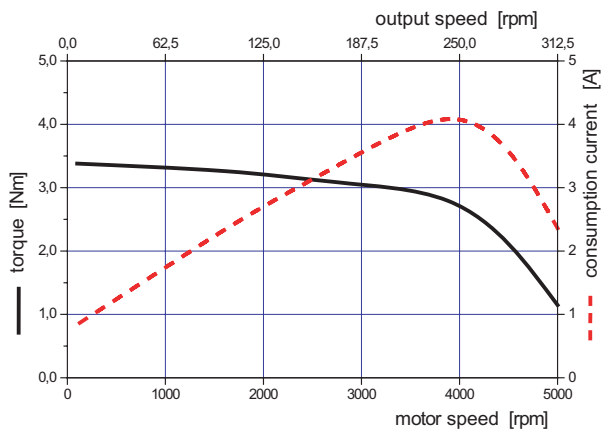


IcIA N065 DC024 with planetary gearing 1-040

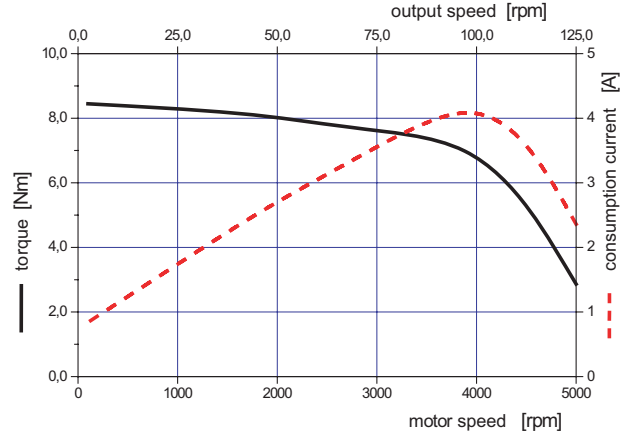

IcIA N065 DC024 with planetary gearing 1-060

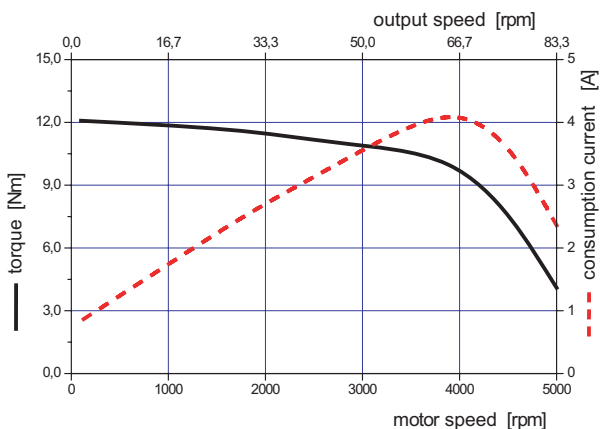


IcIA N065 DC024 with planetary gearing 1-120

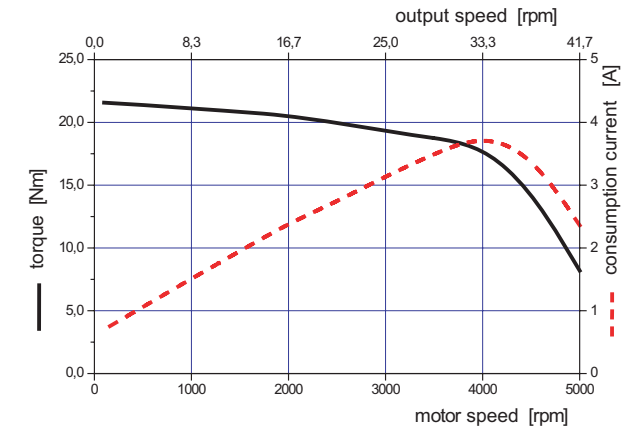

Electrical interfaces

Power supply		reverse-polarity-protected
Nominal power supply range	V _{DC}	19.2 ... 28.8
Ripple at nominal voltage	V	≤3.6
Inrush current	A	Load current for DC bus capacity (500 µF)
24V signal interface		4 signal inputs, 0VDC internally connected with 0VDC supply voltage, reverse-polarity-protected
Permissible low level	V / mA	≤4.5 / ≤0.7
Permissible high level	V / mA	≥15 / ≥2
Admissible voltage range	V	0 ... 30
Signal input debounce time	ms	50 (in manual mode) without debounce (homing movement switch and end position sensors)
CANopen fieldbus interface		CANIn/CANOut - topology
Signal inputs/outputs		according to ISO 11898, no galvanic isolation
Transmission rate	kBaud	10 / 20 / 50 / 100 / 125 / 250 / 500 / 800 / 1000
Transmission protocol		
• Communications profile		DS301 V4.02
• Device profile		DSP 402 V2.0

Dimensional drawings

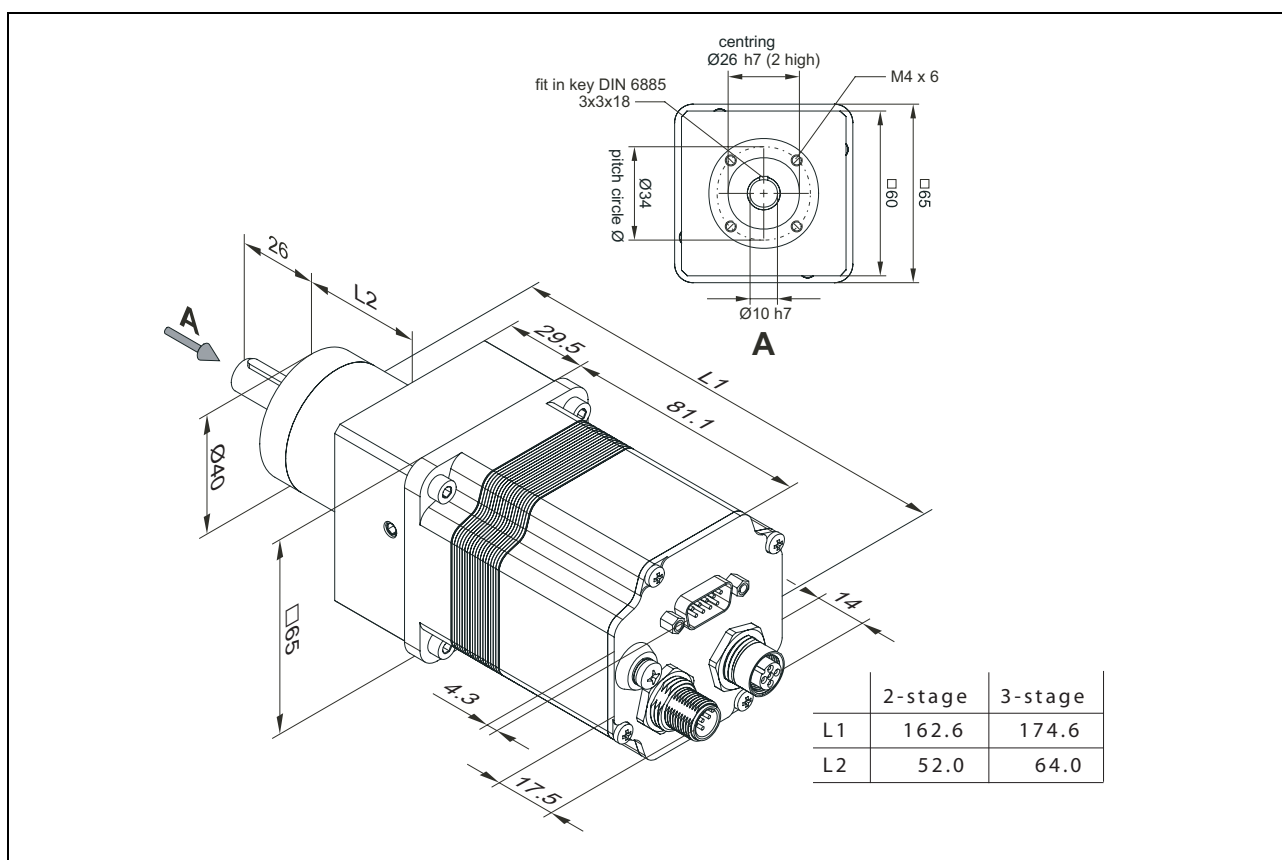

Dimensional drawing of IclA N065 DC024 1-... with planetary gearing

IcIA N065 with angular planetary gearing

Technical data

IcIA® N065	Unit	G-016	G-040	G-060	G-120
Nominal voltage	V	24	24	24	24
Nominal speed	1/min	4000	4000	4000	4000
Nominal output torque	Nm	2.6	6.6	9.5	18.0
Nominal output speed	1/min	250	100	67	33
Nominal output	W	69	69	66	63
Nominal current	A	4.43	4.43	4.43	3.95
Ready-for-operation current	A	0.09	0.09	0.09	0.09
Max. phase current	A	6.0	6.0	6.0	5.5
Maximum speed	1/min	313	125	83	42
Gear speeds		2	2	3	3
Gear efficiency		0.92	0.92	0.88	0.88
Ratio		16:1	40:1	60:1	120:1
Torque constant	Nm/A	0.036	0.036	0.036	0.036
Starting torque	Nm	3.2	8.0	11.5	21.0
Moment of inertia ¹⁾	g cm ²	151	151	151	151
Moment of inertia ²⁾	kg m ²	0.0039	0.0242	0.0544	0.2174
Detent torque	Nm	1.2	3.0	4.5	9.0
Positioning resolution	Inc./rev	12	12	12	12
Positioning resolution	°	1.88	0.75	0.50	0.25
Positioning accuracy	Inc.	±1	±1	±1	±1
Mass	kg	1.6	1.6	1.7	1.7
Number of pole pairs		2	2	2	2
Torsional backlash	°	≤0.75	≤0.75	≤0.83	≤0.83
Shaft load					
• Max. radial force ³⁾	N	200	200	200	200
• Max. axial force	N	200	200	200	200
• Nominal service life L _{10h} ⁴⁾	h	10000	10000	10000	10000

¹⁾ With reference to motor shaft





²⁾ With reference to gearing output shaft

³⁾ With reference to the centre of the output shaft

⁴⁾ Operating hours at a probability of failure of 10%


Ambient conditions

Operating temperature as per DIN EN 60721-3-3, Class 3K3	°C	+5 ... +40 (without power reduction)
Storage temperature as per DIN EN 60721-3-1, Class 1K4	°C	-25 ... +55
Transport temperature as per DIN EN 60721-3-2, Class 2K3	°C	-25 ... +70
Installation height without power reduction	m	<1000 above MSL
Vibration strain		sinusoidal, as per DIN EN 60068-2-6
• Acceleration amplitude:	m/s ²	50
• Frequency range	Hz	10 ... 300
• Amplitude	mm	0.35
Continuous shock		semisinusoidal, as per DIN EN 60068-2-27
• Peak acceleration	m/s ²	300
• Duration	m/s	18
Relative humidity		
• Operation	%	5 ... 85
	g/m ³	1 ... 25
• Long-term storage	%	5 ... 95
	g/m ³	1 ... 29
Degree of protection as per DIN EN 60034-5		IP 65 total device except for shaft bushing; IP 43 shaft bushing

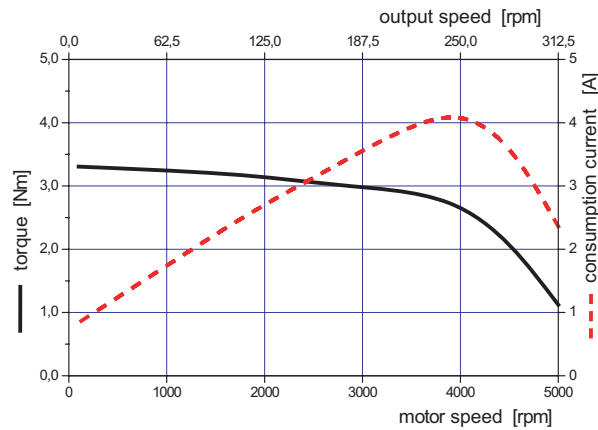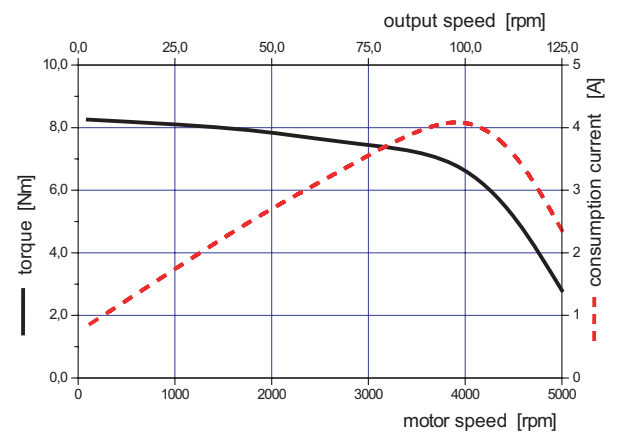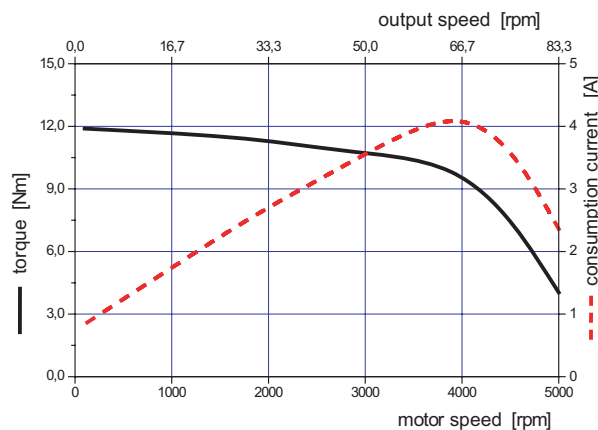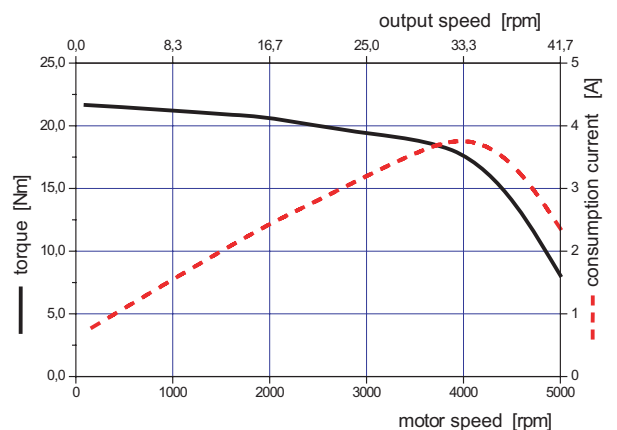Characteristic curves**IcIA N065 DC024 with angular planetary gearing G-016****IcIA N065 DC024 with angular planetary gearing G-040****IcIA N065 DC024 with angular planetary gearing G-060****IcIA N065 DC024 with angular planetary gearing G-120****Electrical interfaces**

Power supply		reverse-polarity-protected
Nominal power supply range	V _{DC}	19.2 ... 28.8
Ripple at nominal voltage	V	≤3.6
Inrush current	A	Load current for DC bus capacity (500 µF)
24V signal interface		4 signal inputs, 0VDC internally connected with 0VDC supply voltage, reverse-polarity-protected
Permissible low level	V / mA	≤4.5 / ≤0.7
Permissible high level	V / mA	≥15 / ≥2
Admissible voltage range	V	0 ... 30
Signal input debounce time	ms	50 (in manual mode) without debounce (homing movement switch and end position sensors)
CANopen fieldbus interface		CANIn/CANOut - topology
Signal inputs/outputs		according to ISO 11898, no galvanic isolation
Transmission rate	kBaud	10 / 20 / 50 / 100 / 125 / 250 / 500 / 800 / 1000
Transmission protocol		
• Communications profile		DS301 V4.02
• Device profile		DSP 402 V2.0

Dimensional drawings

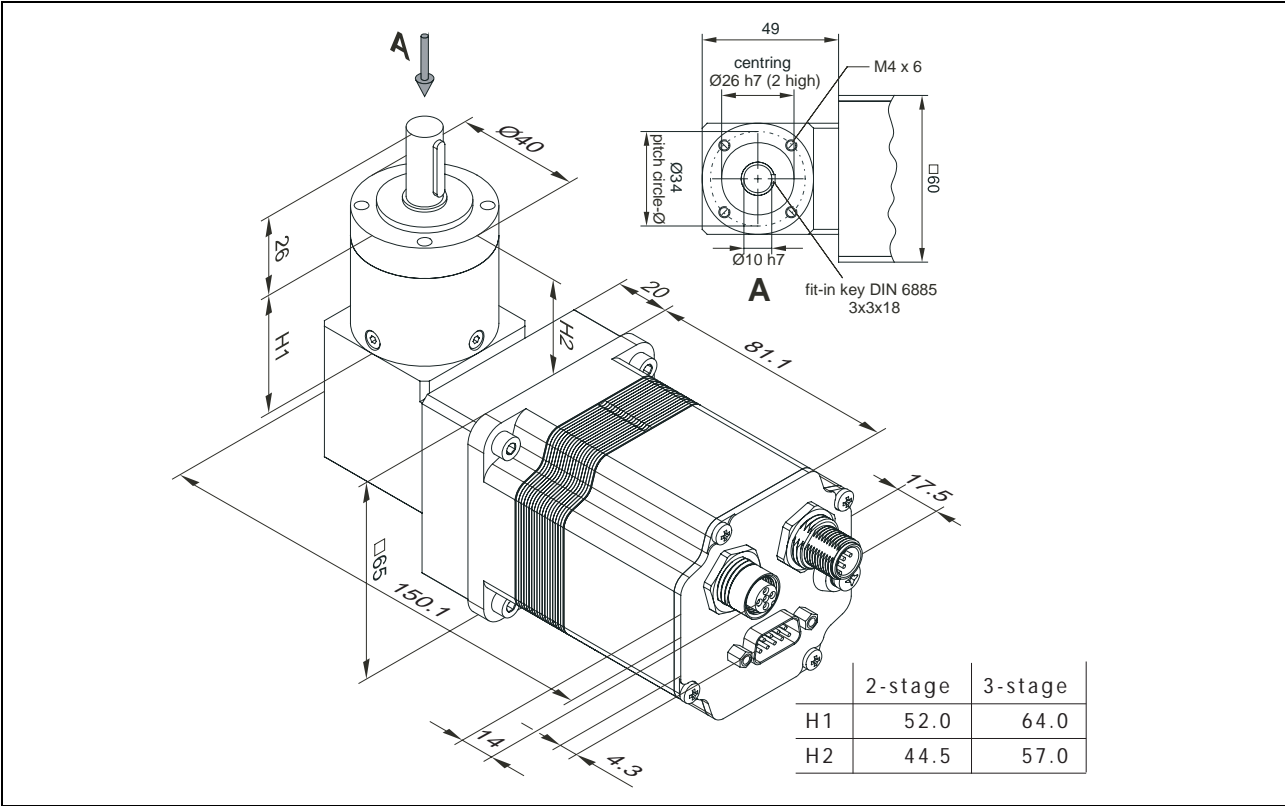

Dimensional drawing of IclA N065 DC024 G-... with angular planetary gearing

IcIA N065 with angular worm gearing**Technical data**


IcIA® N065		U-024	U-054	U-092	U-115
Nominal voltage	V	24	24	24	24
Nominal speed	1/min	4000	4000	4000	4000
Nominal output torque	Nm	2.6	6.0	9.2	10.6
Nominal output speed	1/min	168	75	44	35
Nominal output	W	46	47	42	39
Nominal current	A	4.43	4.43	4.43	4.43
Ready-for-operation current	A	0.09	0.09	0.09	0.09
Max. phase current	A	6.0	6.0	6.0	6.0
Maximum speed	1/min	189	93	54	44
Gear speeds		2	3	3	3
Gear efficiency		0.61	0.62	0.56	0.51
Ratio		525: 22	1715: 32	735: 8	3675: 32
Torque constant	Nm/A	0.036	0.036	0.036	0.036
Starting torque	Nm	2.2	5.0	7.8	8.9
Moment of inertia ¹⁾	g cm ²	165	150	150	150
Moment of inertia ²⁾	kg m ²	0.009	0.043	0.127	0.198
Detent torque	Nm	2.9	6.5	12.3	16.7
Positioning resolution	Inc./rev	12	12	12	12
Positioning resolution	°	1.26	0.56	0.33	0.26
Positioning accuracy	Inc.	±1	±1	±1	±1
Mass	kg	1.7	1.7	1.7	1.7
Number of pole pairs		2	2	2	2
Torsional backlash	°	≤1.5	≤1.0	≤1.0	≤1.0
Shaft load					
• Max. radial force	N	200	200	200	200
• Max. axial force	N	80	80	80	80
• Nominal service life L _{10h} ³⁾	h	9000	9000	6000	3000

¹⁾ With reference to motor shaft²⁾ With reference to gearing output shaft³⁾ Operating hours at a probability of failure of 10%**Ambient conditions**


Operating temperature as per DIN EN 60721-3-3, Class 3K3	°C	+5 ... +40 (without power reduction)
Storage temperature as per DIN EN 60721-3-1, Class 1K4	°C	-25 ... +55
Transport temperature as per DIN EN 60721-3-2, Class 2K3	°C	-25 ... +70
Installation height without power reduction	m	<1000 above MSL
Vibration strain		sinusoidal, as per DIN EN 60068-2-6
• Acceleration amplitude:	m/s ²	50
• Frequency range	Hz	10 ... 300
• Amplitude	mm	0.35
Continuous shock		semisinusoidal, as per DIN EN 60068-2-27
• Peak acceleration	m/s ²	300
• Duration	m/s	18
Relative humidity		
• Operation	%	5 ... 85
	g/m ³	1 ... 25
• Long-term storage	%	5 ... 95
	g/m ³	1 ... 29
Degree of protection as per DIN EN 60034-5		IP 65 total device

Characteristic curves


IclA N065 DC024 with angular worm gearing U-024

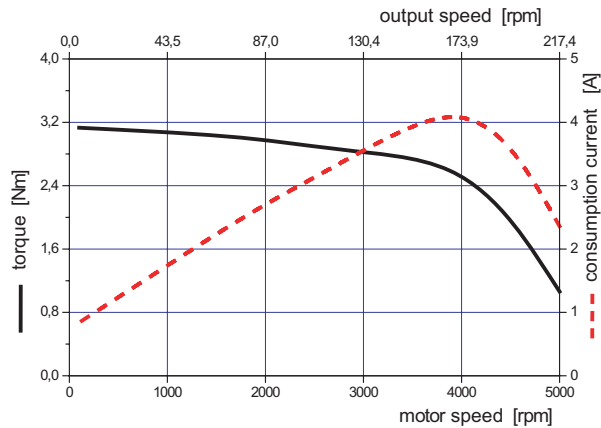


IclA N065 DC024 with angular worm gearing U-054

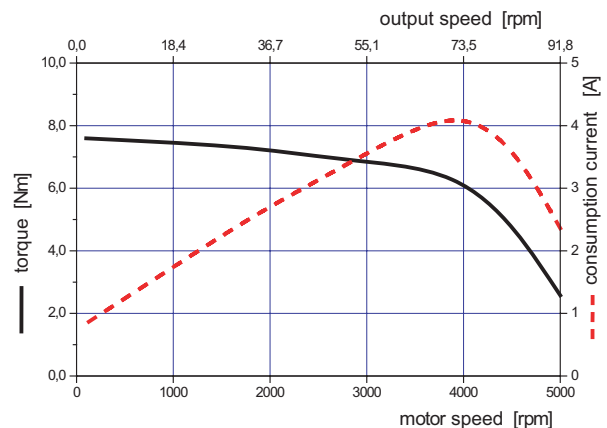

IclA N065 DC024 with angular worm gearing U-092

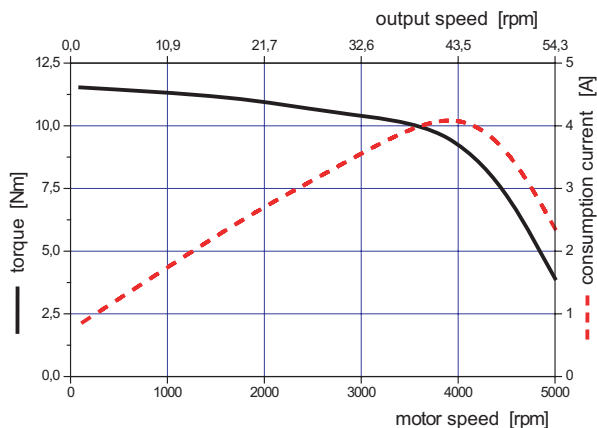


IclA N065 DC024 with angular worm gearing U-115

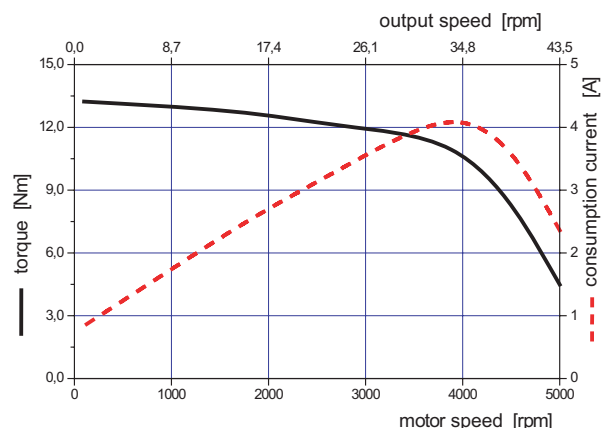

Electrical interfaces

Power supply		reverse-polarity-protected
Nominal power supply range	V _{DC}	19.2 ... 28.8
Ripple at nominal voltage	V	≤3.6
Inrush current	A	Load current for DC bus capacity (500 µF)
24 V signal interface		4 signal inputs, 0VDC internally connected with 0VDC supply voltage, reverse-polarity-protected
Permissible low level	V / mA	≤4.5 / ≤0.7
Permissible high level	V / mA	≥15 / ≥2
Admissible voltage range	V	0 ... 30
Signal input debounce time	ms	50 (in manual mode) without debounce (homing movement switch and end position sensors)
CANopen fieldbus interface		CANIn/CANOut - topology
Signal inputs/outputs		according to ISO 11898, no galvanic isolation
Transmission rate	kBaud	10 / 20 / 50 / 100 / 125 / 250 / 500 / 800 / 1000
Transmission protocol		
• Communications profile		DS301 V4.02
• Device profile		DSP 402 V2.0

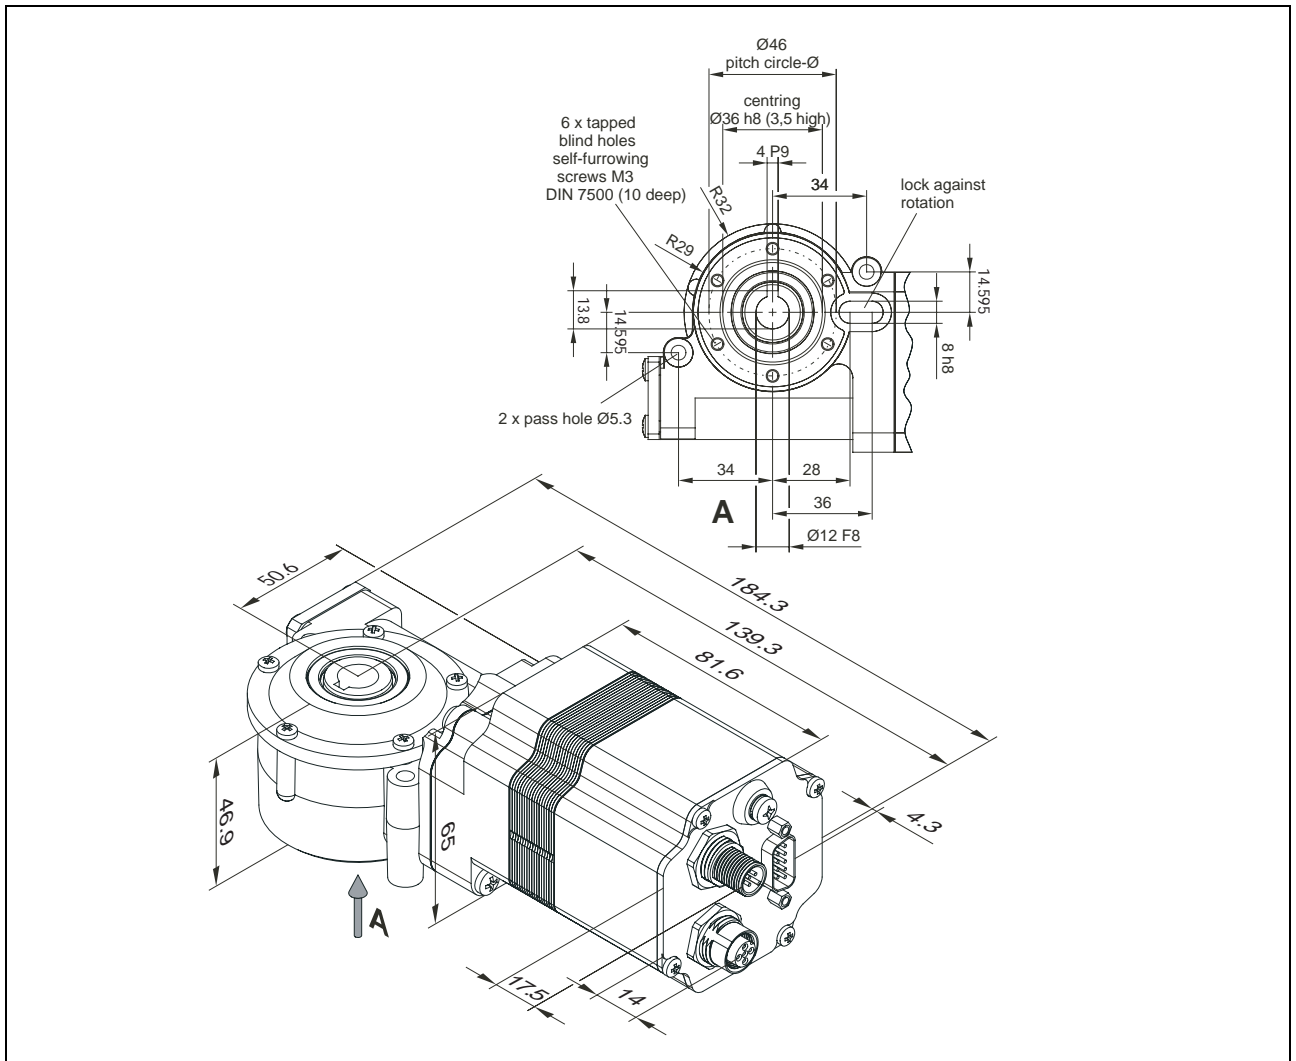Dimensional drawings

Dimensional drawing of IcIA N065 DC024 U-*** with angular worm gearing


Type code

Example:	IclA	N06	5	/	2	DC024	V-007	K	CAN	00
Product family Intelligent Compact Drive IclA	IclA	N06	5	/	2	DC024	V-007	K	CAN	00
Size (flange) N06 = 66 mm	IclA	N06	5	/	2	DC024	V-007	K	CAN	00
Motor package length 5 = 18 mm	IclA	N06	5	/	2	DC024	V-007	K	CAN	00
not used	IclA	N06	5	/	2	DC024	V-007	K	CAN	00
Pole pair count 2	IclA	N06	5	/	2	DC024	V-007	K	CAN	00
Supply voltage DC024 = 24VDC	IclA	N06	5	/	2	DC024	V-007	K	CAN	00
Supply voltage DC024 = 24VDC	IclA	N06	5	/	2	DC024	V-007	K	CAN	00
Gearbox type										
O- without gearing										
V - with spur wheel gearing										
1 - with planetary gearing										
G - with angular planetary gearing										
U - with worm gearing										
Shaft type	IclA	N06	5	/	2	DC024	V-007	K	CAN	00
R = round, smooth shaft (gearbox type O and V only)										
K = parallel key (gearbox type V, 1 and G only)										
F = D-shaped shaft (gearbox type V only)										
H = hollow shaft (gearbox type U only)										
Communication interface	IclA	N06	5	/	2	DC024	V-007	K	CAN	00
CAN = CANopen										
Reserve	IclA	N06	5	/	2	DC024	V-007	K	CAN	00
00										

Accessories

Software and documentation

IcIA CCT commissioning software

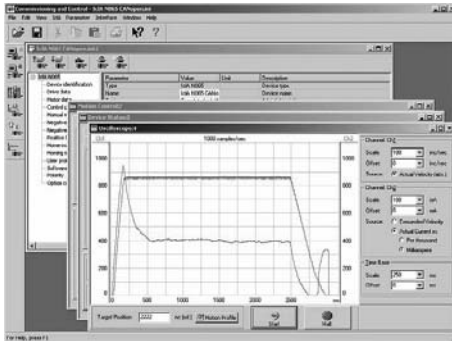

The IcIA CCT commissioning software supports you when commissioning the IcIA N065.

You will require a CAN interface board from IXXAT Automation, a hardware driver for Windows and a licence for the IXXAT CANopen master API, Version 4.0 or compatible, to be able to start the program.

System requirements

Windows 98 or higher; Windows NT4 SP3

Pentium 233 MHz or higher

32 MB RAM; 10 MB free hard-disk space

Order data

Designation	Description	Order number
IcIA CD-ROM	Contents: <ul style="list-style-type: none"> Catalogues, German/English Documentation, German/English "IcIA CCT" commissioning software EDS file for IcIA N065 with CAN bus 	0098441113207
IcIA N065 Documentation	DIN A4, bound	German 0098441113267 English 0098441113268
CANopen documentation	DIN A4, bound	German 0098441113269 English 0098441113270

Signal interface

The signal interface is a 9-pin SubD connector supplied by FCT electronic GmbH.

Order data

Designation	Description	Order number
IcIA cable for signal interface IP65	with 9-pin sub-D socket for connection to signal interface	5m 5900000024 10m 5900000034 20m 5900000035

Accessories for signal interface of IcIA N065 are supplied by the following company. When ordering please note the degree of protection of the compact drive (IP 65 recommended):

FCT electronic GmbH
Schatzbogen 13
D-81829 Munich
Telephone: +49 (0) 89 420004-0
Fax: +49 (0) 89 420004-10
Internet: <http://www.fct-electronic.de>

CAN fieldbus interface

The CAN fieldbus interface consists of a 5-pin M12 flange connector (CAN in) and a 5-pin M12 flange socket (CAN out) supplied by Franz Binder GmbH.

Accessories for the fieldbus interface of the IcIA N065 are supplied by the following companies:

Franz Binder GmbH & Co. elektrische Bauelemente KG
Rötelstraße 27
D-74172 Neckarsulm
Telephone: +49 (0) 7132 325 - 0
Fax: +49 (0) 7132 325 - 150
E-mail: info@binder-connector.de
Internet: <http://www.binder-connector.de>

Hans Turck GmbH & Co. KG
Witzlebenstraße 7
D-45472 Mülheim an der Ruhr
Telephone: +49 (0) 208 4952-0
Fax: +49 (0) 208 4952-264
E-mail: turckmh@mail.turck-globe.de
Internet: <http://www.turck.com>

Conversion tables

Rotor inertia										
	lb-in ²	lb-ft ²	lb-in-s ²	lb-ft-s ² slug-ft ²	kg-cm ²	kg-cm-s ²	g-cm ²	g-cm-s ²	oz-in ²	oz-in-s ²
lb-in ²	–	6.94×10^{-3}	2.59×10^{-3}	2.15×10^{-4}	2.926	2.98×10^{-3}	2.92×10^3	2.984	16	4.14×10^{-2}
lb-ft ²	144	–	0.3729	3.10×10^{-2}	421.40	0.4297	4.21×10^5	429.71	2304	5.967
lb-in-s ²	386.08	2.681	–	8.33×10^{-2}	1.129×10^3	1.152	1.129×10^6	1.152×10^3	6.177×10^3	16
lb-ft-s ² slug-ft ²	4.63×10^3	32.17	12	–	1.35×10^4	13.825	1.355×10^7	1.38×10^4	7.41×10^4	192
kg-cm ²	0.3417	2.37×10^{-3}	8.85×10^{-4}	7.37×10^{-6}	–	1.019×10^{-3}	1000	1.019	5.46	1.41×10^{-2}
kg-cm-s ²	335.1	2.327	0.8679	7.23×10^{-2}	980.66	–	9.8×10^5	1000	5.36×10^3	13.887
g-cm ²	3.417×10^4	2.37×10^{-6}	8.85×10^{-7}	7.37×10^{-8}	1×10^{-3}	1.01×10^{-6}	–	1.01×10^{-3}	5.46×10^{-3}	1.41×10^{-6}
g-cm-s ²	0.335	2.32×10^{-3}	8.67×10^{-4}	7.23×10^{-5}	0.9806	1×10^{-3}	980.6	–	5.36	1.38×10^{-2}
oz-in ²	0.0625	4.3×10^{-4}	1.61×10^{-6}	1.34×10^{-6}	0.182	1.86×10^{-4}	182.9	0.186	–	2.59×10^{-3}
oz-in-s ²	24.13	0.1675	6.25×10^{-2}	5.20×10^{-3}	70.615	7.20×10^{-2}	7.06×10^4	72	386.08	–

Torque								
	lb-in	lb-ft	oz-in	Nm	kg-m	kg-cm	g-cm	dyne-cm
lb-in	–	8.333×10^{-2}	16	0.113	1.152×10^{-2}	1.152	1.152×10^3	1.129×10^6
lb-ft	12	–	192	1.355	0.138	13.825	1.382×10^4	1.355×10^7
oz-in	6.25×10^{-2}	5.208×10^{-3}	–	7.061×10^{-3}	7.200×10^{-4}	7.200×10^{-2}	72.007	7.061×10^4
Nm	8.850	0.737	141.612	–	0.102	10.197	1.019×10^4	1×10^7
kg-m	86.796	7.233	1.388×10^3	9.806	–	100	1×10^5	9.806×10^7
kg-cm	0.8679	7.233×10^{-2}	13.877	9.806×10^{-2}	10^{-2}	–	1000	9.806×10^5
g-cm	8.679×10^{-4}	7.233×10^{-5}	1.388×10^{-2}	9.806×10^{-5}	1×10^{-5}	1×10^{-3}	–	980.665
dyne-cm	8.850×10^{-7}	7.375×10^{-8}	1.416×10^{-5}	10^{-7}	1.019×10^{-8}	1.0197×10^{-6}	1.019×10^{-6}	–

Power		
	H.P.	W
H.P.	–	745.7
W	1.31×10^{-3}	–

Length						
	in	ft	yd	m	cm	mm
in	–	0.0833	0.028	0.0254	2.54	25.4
ft	12	–	0.333	0.3048	30.48	304.8
yd	36	3	–	0.914	91.44	914.4
m	39.37	3.281	1.09	–	100	1000
cm	0.3937	0.03281	1.09×10^{-2}	0.01	–	10
mm	0.03937	0.00328	1.09×10^{-3}	0.001	0.1	–

Rotation			
	1/min (rpm)	rad/sec	deg./sec
1/min (rpm)	–	0.105	6.0
rad/sec	9.55	–	57.30
deg./sec	0.167	1.745×10^{-2}	–

Weight					
	lb	oz	slug	kg	g
lb	–	16	0.0311	0.453592	453.592
oz	6.35×10^{-2}	–	1.93×10^{-3}	0.028349	28.35
slug	32.17	514.8	–	14.5939	1.459×10^4
kg	2.20462	35.274	0.0685218	–	1000
g	2.205×10^{-3}	3.527×10^{-3}	6.852×10^{-5}	0.001	–

Temperature		
	°F	°C
°F	–	$(9 - 32) \cdot \frac{5}{9}$
°C	$9 \cdot \frac{5}{9} + 32$	–

Force					
	lb	oz	gf	dyne	N
lb	–	16	453.592	4.448×10^5	4.4482
oz	0.0625	–	28.35	2.780×10^4	0.27801
gf	2.205×10^{-3}	0.03527	–	980.665	N.A.
dyne	2.248×10^{-6}	3.59×10^{-6}	1.02×10^{-3}	–	0.0001
N	0.22481	3.5967	N.A.	100,000	–

Example for conversion:

Conversion of a 10 inch length measurement into metres. Look for the entry “in” (= inch) in the “Length” table in the left column and the entry “m” (= metre) in the header. The table cell at the point of intersection of the column and the row will show the conversion factor: “0.0254”. Multiply 10 inches by 0.0254 and you will get the value in metres: $10 \text{ in} \times 0.0254 = 0.254 \text{ m}$.



Berger Lahr offers you the positioning and automation solutions you need, based on our technology and proven series of products. Our comprehensive engineering and consulting service is ready to support and advise you every step of the way.

Berger Lahr is a member company of the Schneider Electric Group. With its Merlin Gerlin, Square D and Telemecanique brands, Schneider Electric is one of the leading providers of electrical and automation-engineering solutions.

